


# CoaDATA 501



- Measuring principle: Turbidensitometry
- Process: Single or double determinations
- Reagent block: Heated to 37 degrees C  
1 measuring cell with magnetic mixer motor  
1 stirred reagent position  
4 cuvette incubation positions
- Light protection cap: Integrated pipette guide
- Cuvette: Micro cuvette
- Test volume: 150 ul to 300 ul
- Display: Liquid Crystal Display
- Control panel: Membrane keypad
- Memory: A max. of 7 test methods can be stored
- Conversions: PT (sec) in %, ratio, INR,  
Fibrinogen (sec) in g/l or mg/dl
- Calibration curve: memory of 9 meas. points / assay
- ChipCard (optional): Optional memory board upon request with test specific data such as lot no., calibration curve, preselection for test application for PT, aPTT, TT, Fibrinogen, and others.
- Port I/O: RS-232C
- Power supply: Ext. adapter for 110 VAC or 220 VAC must be ordered for correct voltage
- Weight approx. 1.4 lbs.
- Size: 3.75" wide x 8.40" deep x 2.2" high

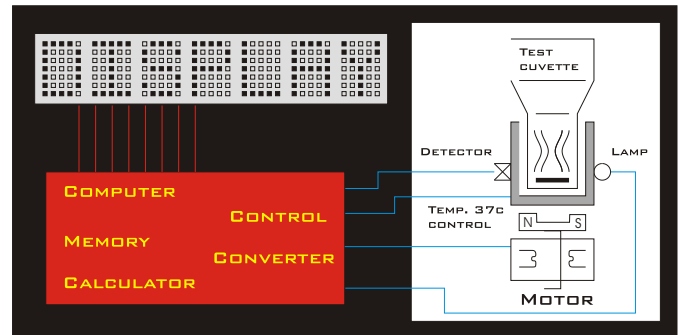

Optional Printer (also needs cable)

**Distributed in the USA by:**  
**American LAbor**  
**1308 Broad Street**  
**Durham, NC 27705**

**Voice 919-286-0726**  
**Fax 919-286-3956**  
**Tech. 800-424-0443**  
**www.americanlabor.org**